

Ti



66HL4M-(V) 610-635 Watt

Mechanical Characteristics

5W*FkbW	@ žrkbW? a` a žJkfeS^f W
@ažaXUW'e	#%\$/((° \$fi
6[W e[a` e	\$%\$° ##%&° % _ _
I WYZf	\$*ž\$]Y
8d` f 9'See	%ž\$ _ ! 3` f[ždW VUf[a` 5aSf[Yl : [YZ FdS` e_ [ee[a` t >ai :d` t FV_ bWVW 9'See
8dS_ W	3` aV[l VW 3'g_ [[g_ 3^ak
<g` Uf[a` 4aj	;B(* DSfVW
BdchVUf[a` 5'See	5'See;;
;75 8[dMfkbW	5'See 5
5a` ` VUfadFkbW	<=" %? !? 5&! AfZVde
Agfbgf 5ST Wđ	&ž' _ _ ° /Efj &" _ _ t/žj \$" _ _ ad5gefa_ [l VW >V YfZ

Packaging Configuration

BS^W 6[W e[a` e	\$%+(° ##"° #S' # _ _
BSU[Y VVWS[^ /Fi a bS^W e/A` WefSU] fi	%# bUe! bS^W e! (\$ bUe! efSU] t ("\$ bUe! &" r: C 5a` fS[Wđ

Specifications (STC)




? S] [g_ Bai Wđ B_ Sj M bO	(#" (#' (\$' (\$' (%' (%'
? S] [g_ Bai Wđ Ha fSYW H_ b MIO	&" ž (&" ž) % &" ž+ &" ž') &#ž\$% &#ž' t
? S] [g_ Bai Wđ 5gdtW f ;_ b NBO	#' ž' & #' ž#" #' ž#(#' ž\$ \$ #' ž\$* #' ž' &
A bW žU[djg[f Ha fSYW HaU MIO	&* ž' % &* ž) + &* ž+ &+ž## &+ž\$ &+ž&%
E Z ad žU[djg[f 5gdtW f :eU NBO	#(ž' # #(ž' * #(ž# #' (ž\$ \$ #' (ž\$+ #' (ž' t
? aVg W7 U[W Uk EF5 M O	\$ž\$ * \$žž) \$žž+ \$žž#& \$žž/\$ \$žž/ #
Bai Wđ Fa WđS` UW	" p t %
FV_ bVđSfgdV5aW U[W feaXB_ Sj	ž ž\$, !, 5
FV_ bVđSfgdV5aW U[W feaXHaU	ž ž\$, !, 5
FV_ bVđSfgdV5aW U[W feaXeU	" ž & , !, 5

EF5 :dtSV[S` UM#""! l_ ž 5W*FV_ bVđSfgdV5` ,5l 3? /#ž

Application Conditions

A bVđSf[Y FV_ bVđSfgdW	ž&" , 5 p t) " , 5
? S] [g_ EkefW_ Ha fSYW	#""!#"" H65/;75fi
? S] [g_ EVđVđ 8geWDSf[Y	% 3


Engineering Drawings

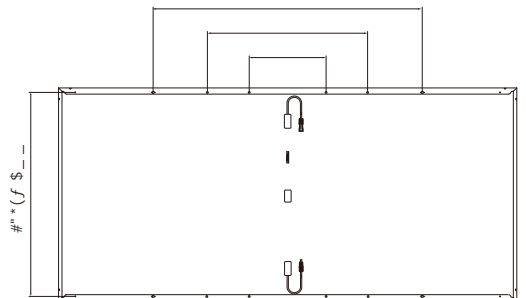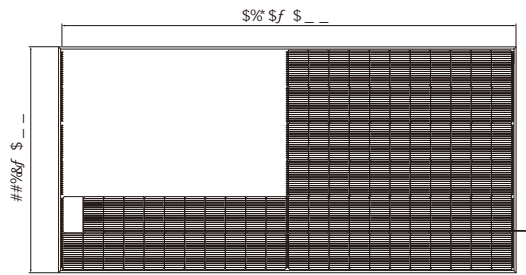

f@aFw8adebWU[UV_ W e[a` eS` V fa VđS` UMđS` YWđ b VđSeW
d/Wđfa fZVUa dt/Mba` V[Y VVWS[VW _ aVg WđSi [Yez

Electrical Performance

Power-Voltage Curves (66HL4M- V 615W)

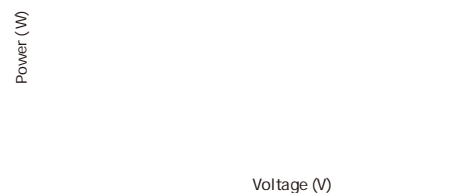

Current-Voltage Curves (66HL4M-(V) 615W)

